


EXDUL-537POE

Ethernet Module with 12 Optocoupler Inputs, 8 Relay Outputs, 6 Counters, LCD Display and Power supply via Power over Ethernet

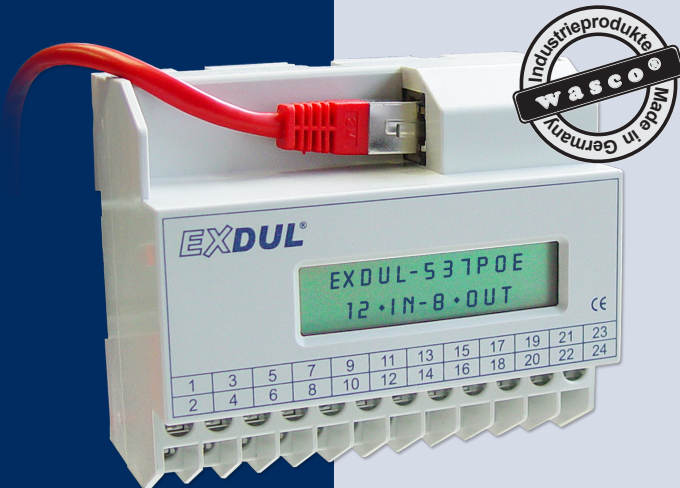

12 optocoupler inputs

8 relay outputs

6 counters 32 Bit

LCD display

Power over Ethernet

SPECIFICATIONS

The EXDUL-537PoE provides 12 digital inputs and eight digital outputs galvanically opto-isolated. The inputs are isolated via high-quality optocouplers protected with additional overvoltage protection diodes. Powerful relays, which can handle a switching current of 2A, ensure the isolation at the outputs.

Six of the 12 optocoupler inputs can also be programmed as hardware-supported 32-bit counter inputs if required.

The module can be powered by both power over Ethernet as via one external voltage source with the emergency agile operating voltage.

The programmable LCD display presents programmable user-specific data or digital I/O status information. The module provides a 24-pin screw terminal block for connecting the external power supply as well as the input and output optocouplers.

The compact chassis enables the module to be used as a portable device with a notebook. For mechanical or control engineering it can also be easily wall mounted or attached to DIN mounting rail.

Digital Optocoupler Inputs

12 bipolar channels galvanically isolated
Optocoupler contact A with one terminal connection each, Optocoupler contact B sharing one terminal
Overvoltage protection diodes
Input voltage ranges
high = 10 ... 30 V
low = 0 ... 3 V

Digital Relay Outputs

8 output channels galvanically isolated
Relay contact A with one terminal connection each, relay contact B sharing one terminal
Contact: 1 NO contact
Contact current rating: max. 2 A per channel
Contact voltage rating: max. 30 V AC / 30 V DC
Contact power rating: max. 60 VA / 60 W
Mechanical lifetime: min. 10⁶ switching cycles without load
Contact lifetime: 2 A, 30 V AC at NO contact, ca 2[·]10⁵ switching cycles
Switching frequency under load: typ. 10/min
Switching frequency without load: typ. 300/min

Counters

6 hardware supported programmable digital 32-bit counters (6 of the input optocouplers are assigned)
Counting frequency: max. 5 kHz

LCD Display

Matrix display with 2 lines and 16 columns presenting 16 signs each line
Programmable to display I/O status or user specific data

Power Supply

Power over Ethernet IEEE802.3 or
+10 V...+30 V via external power supply

Ethernet Interface with PoE

10/100Base-T Ethernet Interface

Module connections

1 * 24pin screw terminal
Ethernet RJ45 socket

Ethernet connecting cable

RJ45 network cable Cat6 or later


Product dimensions

105 mm x 89 mm x 59 mm (l x b x h)

Casing

Plastic casing with integrated snap-on technology for top-hat rail mounting to DIN EN. Suitable for control and engineering technology mounted to control and distribution boxes, surface mounting or mobile use on a desk.

BLOCK DIAGRAM

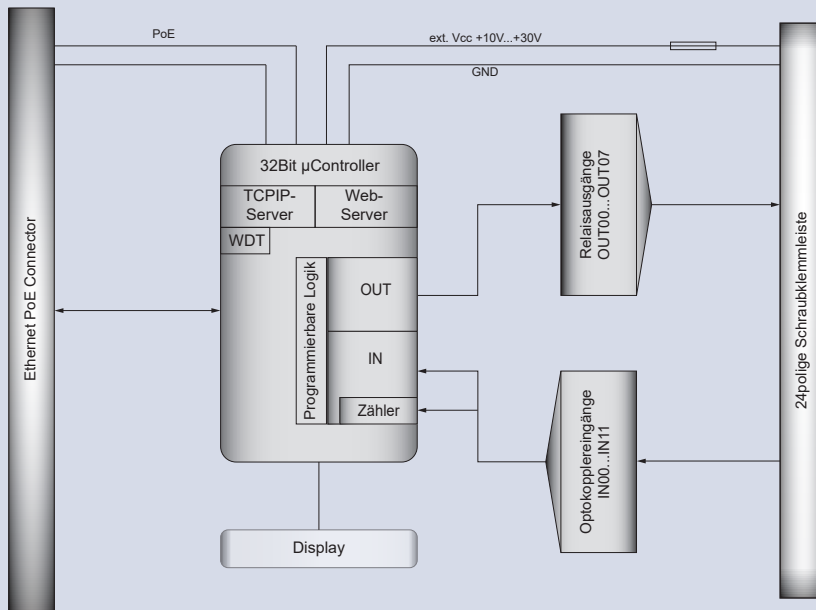

PIN ASSIGNMENT

Terminals Vcc_EXT und GND_EXT are provided for an application of 10 ... 30 V external voltage supply.

Screw Terminal CN1

DOUT01A	2	1	DOUT00A
DOUT03A	4	3	DOUT02A
DOUT05A	6	5	DOUT04A
DOUT07A	8	7	DOUT06A
DIN00 / Counter0	10	9	DOUT00 .. 07B
DIN02 / Counter2	12	11	DIN01 / Counter1
DIN04 / Counter4	14	13	DIN03 / Counter3
DIN06	16	15	DIN05 / Counter5
DIN08	18	17	DIN07
DIN10	20	19	DIN09
DIN_COM	22	21	DIN11
GND_EXT	24	23	Vcc_EXT

PROGRAMMING

Windows®:

Driver and program examples for Java, VB.NET, C++, C#.NET, LabView Tutorial

Linux®:

Driver and program examples for C, C++ and Java (see manual)

Download at:
www.messcomp.com, Section Support - Software


SCOPE OF DELIVERY

Ethernet Module EXDUL-537PoE
Cat.6 Ethernet cable 1 m
German Description (English on request)
Installation and sample programs


ORDER INFORMATION

EXDUL-537PoE EDP-No. A-375450
Ethernet Optocoupler I/O Module

ASSEMBLY AND APPLICATION OP-



Top-hat Rail Mounting



Wall Mounting



Mobile Use on a Desk

For more detailed information about the here listed and other accessories we refer to the corresponding data sheets

Product and company names mentioned may be trademarks of their respective owners